

3

Contactors

C310 Series

1 pole
AC and bi-directional DC
NO contactors for
150 A, 300 A and 500 A

Catalogue C310.en



More information
schaltbau.com

C310 – 1 pole AC and bi-directional DC NO contactors

Compact single-pole NO contactors for AC and DC up to 1,500 V rated insulation voltage. Making current up to 2,500 amps; conventional thermal current up to 500 amps; short-time current up to 3,000 amps.


The bi-directional DC contactors switch high powers in a small space. With a making capacity of up to 2,500 amps, the compact switchgear is suitable for applications with high inrush current or high capacities.


In the C310A/500 design, the contactor can continuously conduct up to 500 amps. In the event of a short circuit, 3,000 amps, can even flow for one second without the contacts welding. The contactor therefore maintains


its full function in order to disconnect high power ranges if necessary up to 500 amps and up to 1,500 volts – irrespective of the current direction. This full bidirectionality is important for systems with a charging and discharging process, such as in battery networks or electric vehicles. Other typical application areas are the DC circuit in inverters, combiner boxes in photovoltaic systems or the management of battery storage systems.


Features


C310 series

- 

Compact dimensions – high rated insulation voltage of up to U_i 1,500 volts
The C310A, without its arcing cover, has width, depth and height dimensions of 146 x 81 x 90 mm. Nevertheless, all the air gaps in the contact area have been generously dimensioned: The rated insulation voltage is 1,500 volts. The arcing chamber of the C310 is made of plastic, all versions weigh less than a kilogram.
- 

High making capacity I_{cm} of up to 2,500 amps
The C310 can switch on a current of up to 2,500 amps (monostable design in a horizontal installation position; L/R = 0 ms). A PWM controller regulates the coil current and ensures low-bounce switch-on as well as a low holding power. High contact forces and optimised silver contacts both contribute to the excellent making capacity
- 

High thermal continuous current I_{th} of up to 500 amps
The contactor of the C310A/500 version can continuously carry up to 500 amps. (Cross-section of the connections: 185 mm², maximum ambient temperature: 85° C; terminal heating: +65 kelvin). The value is achieved through very high contact forces.
- 


High short-time withstand current rating I_{cw} of up to 3.000 Ampere
The C310 can carry a current of up to 3,000 amps for one second without the contacts welding. This is enough time for the short circuit fuse to trip. The short-time withstand current rating is based on high contact forces and optimised silver contacts.
- 


Full bidirectionality - reliable disconnection of high powers
If necessary, version A of the C310 can reliably disconnect high currents and voltages, irrespective of the current direction. These properties are achieved through the special arrangement of blowout magnets and arcing chambers, high contact forces and generously dimensioned clearances in the contact area.


Standards


C310 series

Contactors meet requirements for industrial applications to:

- 

IEC 60947-4-1
Low-voltage switchgear and controlgear – Part 4-1: Contactors and motor starters – Electromechanical contactors and motor starters.
- 

UL 60947-4-1
Low-Voltage Switchgear and Controlgear – Part 4-1: Contactors and Motor-Starters – Electromechanical Contactors and Motor-Starters.
- 

ISO 16750-1
Road vehicles - Environmental conditions and testing for electrical and electronic equipment - Part 1: General
- 

GB/T 14048.4
Low-Voltage Switchgear and Controlgear – Part 4-1: Contactors and Motor-Starters – Electromechanical Contactors and Motor-Starters.

Reliable, robust and economical

C310 series

Contactors of the C310 series are designed for continuous currents of 150 amps, 300 amps and 500 amps. The switchgear has both high making and breaking capacities, and a high short-time withstand current. This ensures high operational safety.

Thanks to an integrated electronic coil control, the DC contactors of the C310 series are continuously reliable, irrespective of the ambient temperature. This also ensures low energy consumption of the monostable version in the switched on state. Inherent to its design, the bistable version consumes no power in both end positions.

Dependent on the application, high requirements can be placed on electromechanical components. The new DC contactors are highly resistant to shock and vibration loads and meet the high requirements of ISO 16750.

Application

C310 series

Thanks to its long-standing experience and competence in the development of electromechanical switchgear and its mastery in the area of DC electric arcs, Schaltbau has developed an innovative solution with its new DC contactors that greatly simplifies applications in the area of direct current switching. As the C310 series safely controls both current directions, the contactors are ideal for all applications involving energy recovery. A typical example here is energy storage, where batteries are

repeatedly charged and discharged. Other application areas for the C310 series are regenerative systems, DC charging stations and photovoltaic systems. In battery powered and hybrid vehicles, the devices can be used directly as the main contactor in the battery disconnect unit (BDU). This reliably ensures the disconnection of both poles from the vehicle in the event of a short circuit.



Photovoltaics

- DC switching in central inverters
- Electrical cabinet (Combiner-Box)



Battery energy storage systems

- Grid stabilization and battery energy storage
- Regenerative systems in industrial plants
- Battery management systems
- Home energy storages



E-mobility:

- Electrical vehicles, hybrid vehicles and trolley busses
- DC charging station
- Battery test system

Ordering key

C310 series

Series, contact configuration		Example: C310A/500 24I-V1		Auxiliary switches, number / type	
C310	1 pole NO contactor, AC and DC bi-directional			---	V0
Version				S880 W1R6 a / 1x	V1
A	1.000 V DC			Coil design	
S	60 V DC			Monostable with integrated PWM module	I
Conv. thermal current				Bistable without PWM module	B
150	$I_{th} = 150 \text{ A}$				
300	$I_{th} = 300 \text{ A}$				
500	$I_{th} = 500 \text{ A}$				
Coil voltage					
24	Monostable $U_s = 9.5 \dots 36 \text{ V DC}$	Bistable $U_s = 24 \text{ V DC}$			
48	in process	$U_s = 48 \text{ V DC}$			
Accessories					
C310-TP	Deflection shield				



Note:

Presented in this catalogue are only stock items which can be supplied in short delivery time. For some variants minimum quantities apply. Please do not hesitate to ask for the conditions.

Special variants:

If you need a special variant of the contactor, please do not hesitate to contact us. Maybe the type of contactor you are looking for is among our many special designs. If not, we can also supply customized designs. In this case, however, minimum order quantities apply.

Specifications C310 S version «S» for $U_e = 60$ V DC

Series C310

Series		C310S/150	C310S/300	C310S/500
Type of voltage		DC, bidirectional / AC, $f \leq 60$ Hz and 1,000 V max.		
Main contacts, configuration		1x NO		
Rated operational voltage U_e		60 V @ PD3		
Rated insulation voltage U_i		1,000 V @ PD3 / 1,500 V @ PD2		
Rated impulse withstand voltage U_{imp}		8 kV		
Pollution degree / Overvoltage category		PD2, PD3: see U_e and U_i / OV3		
IEC/UL 60947-4-1				
Conventional free air thermal current I_{th}	$T_a = 40^\circ\text{C} / T_a = 70^\circ\text{C}$	150 A / 150 A	300 A / 300 A	500 A / 400 A
Power dissipation per pole I_{th} @ 40 °C	typ.	3.5 W	11 W	30 W
Pole impedance	typ.	150 $\mu\Omega$	120 $\mu\Omega$	120 $\mu\Omega$
Utilization category AC-1 / AC general use $U_e = 48$ V	Rated operational current I_e	150 A	300 A	500 A
Utilization category DC-1 / DC general use $U_e = 48$ V	Rated operational current I_e	150 A	300 A	500 A
Frequency of operation (operations per hour) I_e	AC-1 & DC-1	360	360	360
Rated short-time withstand current I_{cw}	$t = 1$ s	3,000 A		
Short circuit protection device for contactors		on request	on request	on request
Electrical endurance	IEC 60947-4-1 / UL 60947-4-1	10,000 operations DC (L/R = 1 ms) AC ($\cos\phi = 0.8$): 48 V / 150 A	10,000 operations DC (L/R = 1 ms) AC ($\cos\phi = 0.8$): 48 V / 300 A	10,000 operations DC (L/R = 1 ms) AC ($\cos\phi = 0.8$): 48 V / 500 A
Other electrical ratings of main circuit				
Conventional free air thermal current I_{th}	$T_a = 85^\circ\text{C}$ (cross section) Terminal heating	200 A (50 mm ²) 45 K	350 A (120 mm ²) 45 K	500 A (185 mm ²) 65 K
Power dissipation per pole	I_{th} @ 40 °C, typ.	5 W	15 W	30 W
Pole impedance	typ.	125 $\mu\Omega$	120 $\mu\Omega$	120 $\mu\Omega$
Rated short-circuit making capacity I_{cm} (L/R = 0 ms)	For mono- or bistable drive (depending on mounting position)	monostable: horizontal: 2,500 A, vertical: 2,000 A bistable: horizontal: 750 A, vertical: 750 A		
Breaking capacity (L/R = 0,1 ms)	$U_e = 60$ V / $I_e = 750$ A (bistable) $U_e = 60$ V / $I_e = 800$ A (monostable)	60 operations	60 operations	60 operations
Main contacts				
Contact material		AgSnO ₂	AgSnO ₂	AgSnO ₂
Terminals		M8	M10	M10
Torque		6 Nm max.	10 Nm max.	10 Nm max.
Auxiliary contacts				
Number, configuration / Contact material		1x S880 W1R6 A / Silver		
Making / breaking capacity S880		AC-15: 230 VAC / 1.0 A DC-13: 60 VDC / 0.5 A		
Minimum voltage / Current		5 V / 5 mA		
Terminals		Flat quick connect 2.8 x 0.5 mm		
Magnetic drive (monostable)				
Rated control supply voltage U_s / Operating range		12 ... 24 VDC / 9.5 ... 36 VDC		
Pollution degree / Overvoltage category		PD3 / OV2		
Coil power dissipation, max. ($T_a = 20^\circ\text{C} / U_s$)		50 W (24 V) / 2.6 W		
Pull-in power (0.2s) / Holding power		50 W (24 V) / 2.6 W		
Frequency of operation (operations per hour, no load)	$T_a = 20^\circ\text{C} / 70^\circ\text{C}$	3,600 h ⁻¹ / 1,800 h ⁻¹		
Pull-in time ($T_a = 20^\circ\text{C} / U_s$) / Drop-off time ($T_a = 20^\circ\text{C} / U_s$)	typ.	33 ms / 25 ms		
Coil suppression (integrated) / Coil terminal		Suppressor diode / Flat tap 6.3 x 0.8 mm		
Magnetic drive (bistable)				
Rated control supply voltage U_s / Min. operating voltage		24 VDC @ ON time 0.1 ... 0.5 s max. / 15 VDC @ ON time 0.1 ... 0.5 s max.		
Pollution degree / Overvoltage category		PD3 / OV2		
Coil power dissipation, max. ($T_a = 20^\circ\text{C} / U_s$)		35 W		
Frequency of operation (operations per hour, no load)	$T_a = 20^\circ\text{C} / 70^\circ\text{C}$	1,800 h ⁻¹ / 1,800 h ⁻¹		
Pull-in time ($T_a = 20^\circ\text{C} / U_s$) / Drop-off time ($T_a = 20^\circ\text{C} / U_s$)	typ.	20 ms / 13 ms		
Coil suppression (integrated) / Coil terminal		Suppressor diode / Flat tap 6.3 x 0.8 mm		
Mounting position		vertical / horizontal (not upside-down, see page 6)		
Degree of protection	IEC 60529	IP00		
Mechanical endurance	monostable / bistable	2,000,000 operations / 100,000 operations		
Shock / Vibration	IEC 61373 / ISO 16750-1	Category 1, class B / Class C		
Temperatures	Operating temperature / Storage temperature Altitude / Humidity (EN 50125-1)	-40 °C ... +85 °C / -40 °C ... +85 °C < 2,000 m above sea level / < 75 % on an annual average		
Weight		0.55 kg	0.63 kg	0.65 kg

Specifications C310 A version «A» for $U_e = 1,000$ V DC


C310 series

Series		C310A/150	C310A/300	C310A/500
Type of voltage		DC, bidirectional / AC, $f \leq 60$ Hz and 1,000 V max.		
Main contacts, configuration		1x NO		
Rated operational voltage U_e		1,000 V @ PD3 / 1,500 V @ PD2		
Rated insulation voltage U_i		1,000 V @ PD3 / 1,500 V @ PD2		
Rated impulse withstand voltage U_{imp}		8 kV		
Pollution degree / Overvoltage category		PD2, PD3: see U_e and U_i / OV3		
IEC/UL 60947-4-1				
Conventional free air thermal current I_{th}	$T_a = 40^\circ\text{C} / T_a = 70^\circ\text{C}$	150 A / 150 A	300 A / 300 A	500 A / 400 A
Power dissipation per pole I_{th} @ 40 °C	typ.	3.5 W	11 W	30 W
Pole impedance	typ.	150 $\mu\Omega$	120 $\mu\Omega$	120 $\mu\Omega$
Utilization category AC-1 / AC general use $U_e = 750$ V	Rated operational current I_e	60 A	60 A	60 A
Utilization category DC-1 / DC general use $U_e = 750$ V	Rated operational current I_e	60 A	60 A	60 A
Frequency of operation (operations per hour) I_e	AC-1 & DC-1	360	360	360
Rated short-time withstand current I_{cw}	$t = 1s$		3,000 A	
Short circuit protection device for contactors (w/o thermal overload relay) $U_e = 900$ V DC, $I_{prosp} = 10$ kA, coord. type "2", fuse: SIBA SQB-DC 2 (aR Type)		200 A	315 A	2x 250 A (parallel)
Electrical endurance	IEC 60947-4-1 UL 60947-4-1	8,000 operations @ DC ($L/R = 1$ ms), AC ($\cos\phi = 0.8$): 750 V / 60 A 8,000 operations @ DC ($L/R = 1$ ms), AC ($\cos\phi = 0.8$): 600 V / 50 A		
Other electrical ratings of main circuit				
Conventional free air thermal current I_{th}	$T_a = 85^\circ\text{C}$ (cross section) Terminal heating	200 A (50 mm ²) 45 K	350 A (120 mm ²) 45 K	500 A (185 mm ²) 65 K
Power dissipation per pole	I_{th} @ 40 °C, typ.	5 W	15 W	30 W
Pole impedance	typ.	125 $\mu\Omega$	120 $\mu\Omega$	120 $\mu\Omega$
Rated short-circuit making capacity I_{cm} ($L/R = 0$ ms) For mono- or bistable drive (depending on mounting position)		monostable: horizontal: 2,500 A, vertical: 2,000 A bistable: horizontal: 750 A, vertical: 750 A		
Breaking capacity ($L_{max} = 0,25$ mH, other values on request) Single contact	$U_e = 1,500$ V / $I_e = 50$ A $U_e = 900$ V / $I_e = 400$ A $U_e = 750$ V / $I_e = 500$ A $U_e = 500$ V / $I_e = 750$ A (bistable) $U_e = 500$ V / $I_e = 800$ A (monostable)	60 operations	60 operations	60 operations
Double contact circuit	$U_e = 1,500$ V / $I_e = 500$ A $U_e = 1,000$ V / $I_e = 800$ A	Operating conditions on request		
Main contacts				
Contact material		AgSnO ₂	AgSnO ₂	AgSnO ₂
Terminals		M8	M10	M10
Torque		6 Nm max.	10 Nm max.	10 Nm max.
Auxiliary contacts				
Number, configuration / Contact material		1x S880 W1R6 A / Silver		
Making / breaking capacity S880		AC-15: 230 VAC / 1.0 A DC-13: 60 VDC / 0.5 A		
Minimum voltage / Current		5 V / 5 mA		
Terminals		Flat quick connect 2.8 x 0.5 mm		
Magnetic drive (monostable)				
Rated control supply voltage U_c / Operating range		12 ... 24 VDC / 9.5 ... 36 VDC		
Pollution degree / Overvoltage category		PD3 / OV2		
Coil power dissipation, max. ($T_a = 20^\circ\text{C} / U_s$) Pull-In power (0.2s) / Holding power		50 W (24 V) / 2.6 W		
Frequency of operation (operations per hour, no load)	$T_a = 20^\circ\text{C} / 70^\circ\text{C}$	3,600 h ⁻¹ / 1,800 h ⁻¹		
Pull-in time ($T_a = 20^\circ\text{C} / U_s$) / Drop-off time ($T_a = 20^\circ\text{C} / U_s$)	typ.	33 ms / 25 ms		
Coil suppression (integrated) / Coil terminal		Suppressor diode / Flat tap 6.3 x 0.8 mm		
Magnetic drive (bistable)				
Rated control supply voltage U_c / Min. operating voltage		24 VDC @ ON time 0.1 ... 0.5 s max. / 15 VDC @ ON time 0.1 ... 0.5 s max.		
Pollution degree / Overvoltage category		PD3 / OV2		
Coil power dissipation, max. ($T_a = 20^\circ\text{C} / U_s$)		35 W		
Frequency of operation (operations per hour, no load)	$T_a = 20^\circ\text{C} / 70^\circ\text{C}$	1,800 h ⁻¹ / 1,800 h ⁻¹		
Pull-in time ($T_a = 20^\circ\text{C} / U_s$) / Drop-off time ($T_a = 20^\circ\text{C} / U_s$)	typ.	20 ms / 13 ms		
Coil suppression (integrated) / Coil terminal		Suppressor diode / Flat tap 6.3 x 0.8 mm		
Mounting position		vertical / horizontal (not upside-down, see page 6)		
Degree of protection	IEC 60529	IP00		
Mechanical endurance	monostable / bistable	2,000,000 operations / 100,000 operations		
Shock / Vibration	IEC 61373 / ISO 16750-1	Category 1, class B / Class C		
Temperatures	Operating temperature / Storage temperature Altitude / Humidity (EN 50125-1)	-40 °C ... +85 °C / -40 °C ... +85 °C < 2,000 m above sea level / < 75 % on an annual average		
Weight		0.83 kg	0.90 kg	0.95 kg

Minimum distances, electrical endurance


C310 series

• Version «A»: with arc chamber cover

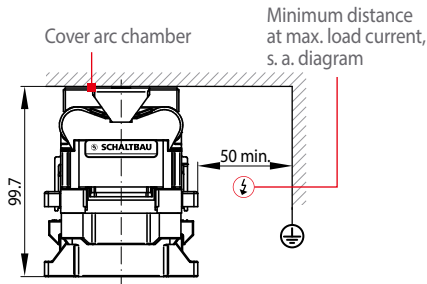


i The extinguishing chamber cover is part of the standard scope of delivery for the C310A/150, C310A/300 and C310A/500 series.

• Version «A»: w/o arc chamber cover

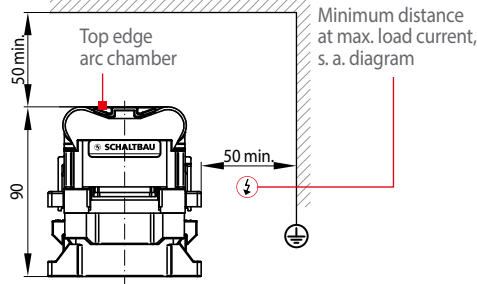


i It is permissible to use the C310A/150, C310A/300 and C310A/500 series without arc chamber cover, taking into account additional clearance dimensions.

• Version «S»: w/o arc chamber




i For the C310S/150, C310S/300 and C310S/500 series there is a minimum distance of 15 mm to live or earthed parts.


• Insertable deflection shields:

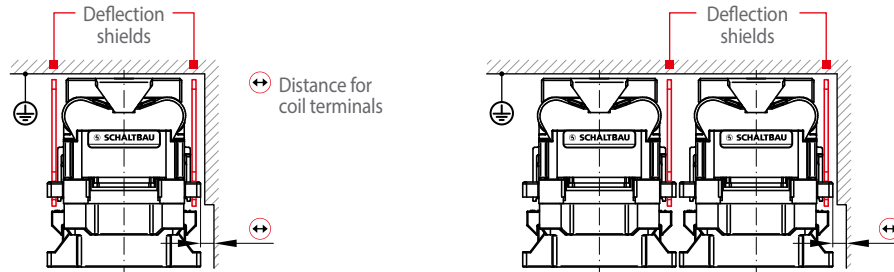

• Minimum distances ⚡ to live or earthed parts

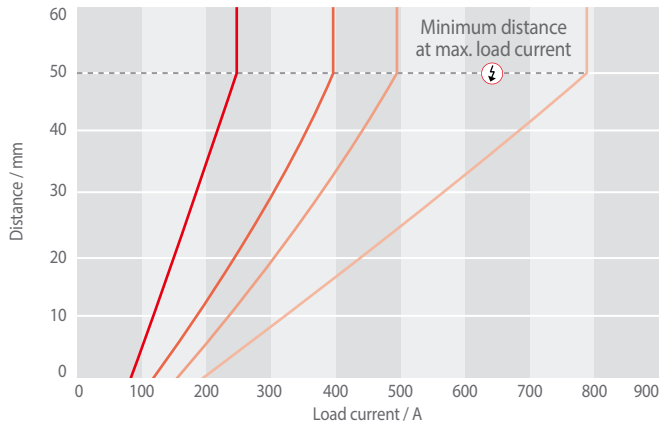


• Predicted electrical endurance as a function of the load current

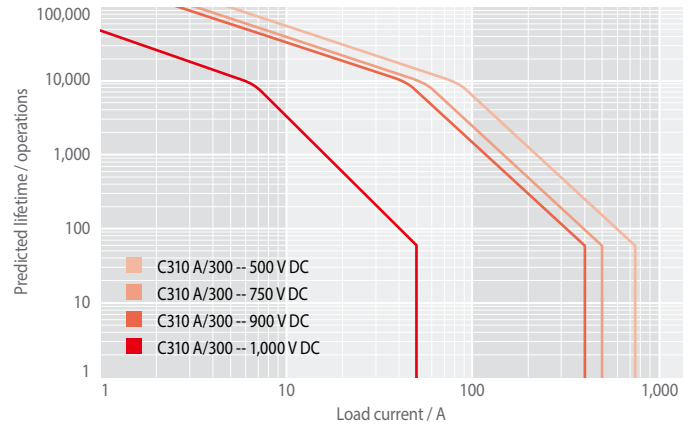

Mounting instructions


C310 series

• Permissible mounting orientations

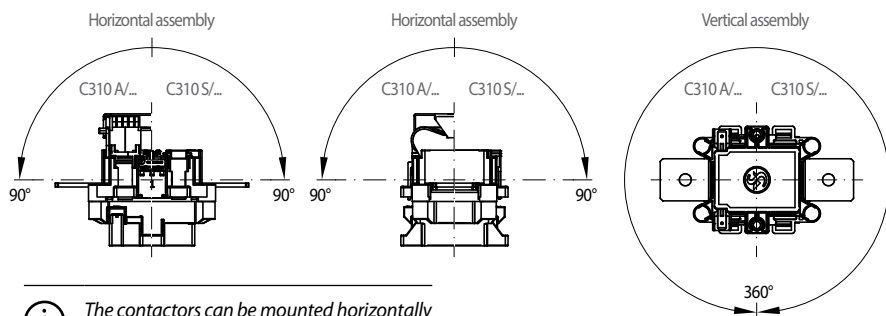

i The contactors can be mounted horizontally or vertically on a prepared mounting plate. Mounting positions hanging upside down are not allowed!

• Mounting holes




i The contactors are mounted on a mounting plate with two M5 screws.


Dimension and circuit diagram

C310 series





• Dimension diagram, version «A»: C310A/150, C310A/300, C310A/500

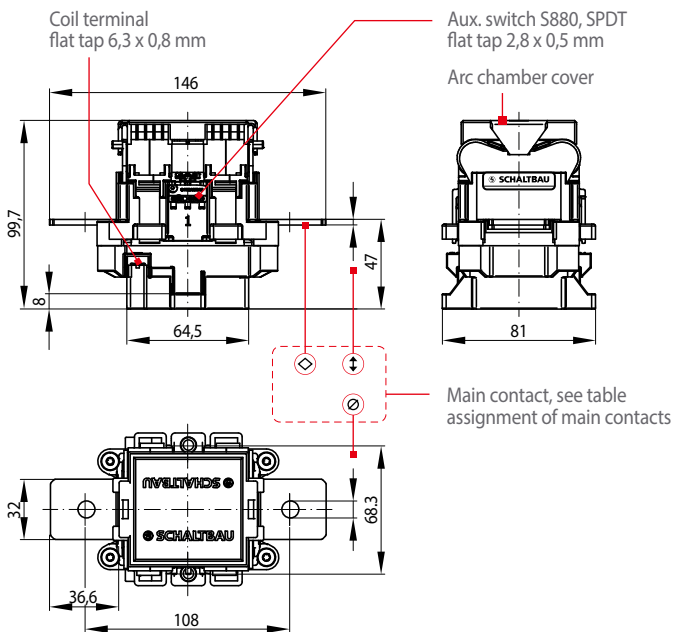

• Dimension diagram, version «S»: C310S/150, C310S/300, C310S/500

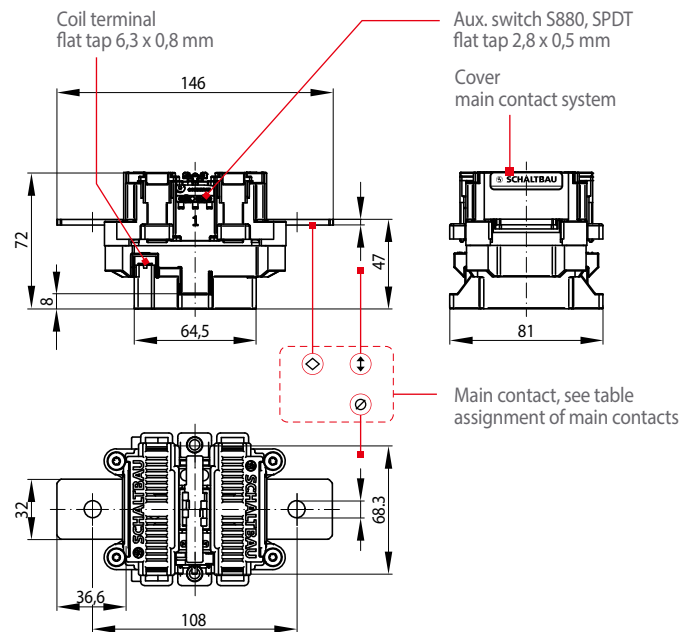

• Circuit diagram

Version	Monostable *	Bistable **
V0 – w/o aux. contact	A1 + 1  A2 – 2	A1 +/- 1 12 14  A2 +/- 2 11
V1 – 1 aux contact Snap-action switch S880 W1R6 a	A1 + 1 12 14  A2 – 2 11	A1 +/- 1 12 14  A2 +/- 2 11

* Coil suppression integrated, additional circuit is not allowed!

** Switching by reversing the polarity, voltage pulse 1 sec max.

• Assignment of main contacts

Version	Material ◊	Thickness †	Diameter ⊙
C310 A/150 ...	Copper	3 mm	∅ 9 mm
C310 A/300 ...	Copper	3 mm	∅ 11 mm
C310 A/500 ...	Copper, silver plated	5 mm	∅ 11 mm
C310 S/150 ...	Copper	3 mm	∅ 9 mm
C310 S/300 ...	Copper	3 mm	∅ 11 mm
C310 S/500 ...	Copper, silver plated	5 mm	∅ 11 mm

Maintenance and safety instructions

C310 series

Maintenance:

- C310 series contactors are basically maintenance free.
- Make regular in-depth visual inspections once or twice a year.

Safety instructions:

- The device must be used according to the intended purpose as specified in the technical documentation. You are obliged to observe all specifications depending on operating temperature, degree of pollution etc. that are relevant to your application.
- Without further safety measures the CS Series contactors are not suited for use in potentially explosive atmospheres.
- In case of malfunction of the device or uncertainties stop using it any longer and contact the manufacturer instantly.
- Tampering with the device can seriously affect the safety of people and equipment. This is not permitted and leads to an exclusion of liability and warranty.
- Coil suppression for reducing surges when the coil is switched off is optimally attuned to the contactor's switching behaviour. The existing opening characteristic must not be negatively influenced by parallel connection with an external diode.



For detailed maintenance, safety and mounting instructions please refer to our operating manuals C310-M.en!

- Contactors running permanently may heat up. So make sure that the contactor has sufficiently cooled down before you start any inspection or maintenance work.
- When installing CS contactors with magnetic blowout make sure to do it in such a way that no magnetizable parts can be attracted by the permanent magnets that are also capable of destroying all data of swipe cards.
- Strong electromagnetic induction caused when switching off can influence other components installed near the contactor.
- Improper handling of the contactor, e.g. when hitting the floor with some impact, can result in breakage, visible cracks and deformation.



Defective contactors or parts (e.g. arc chambers, auxiliary switches) must be replaced immediately!

Schaltbau GmbH

For detailed information on our products and services visit our website – or give us a call!

Schaltbau GmbH
Hollerithstrasse 5
81829 Munich
Germany



Phone +49 89 9 30 05-0
Fax +49 89 9 30 05-350
Internet www.schaltbau.com
e-Mail contact@schaltbau.de

with compliments:



Schaltbau GmbH manufactures in compliance with RoHS.



The production facilities of Schaltbau GmbH have been IRIS certified since 2008.



Certified to DIN EN ISO 14001 since 2002. For the most recent certificate visit our website.



Certified to DIN EN ISO 9001 since 1994. For the most recent certificate visit our website.

Electrical Components and Systems for Railway Engineering and Industrial Applications

Connectors

- Connectors manufactured to industry standards
- Connectors to suit the special requirements of communications engineering (MIL connectors)
- Charging connectors for battery-powered machines and systems
- Connectors for railway engineering, including UIC connectors
- Special connectors to suit customer requirements

Snap-action switches

- Snap-action switches with positive opening operation
- Snap-action switches with self-cleaning contacts
- Enabling switches
- Special switches to suit customer requirements

Contactors

- Single and multi-pole DC contactors
- High-voltage AC/DC contactors
- Contactors for battery powered vehicles and power supplies
- Contactors for railway applications
- Terminal bolts and fuse holders
- DC emergency disconnect switches
- Special contactors to suit customer requirements

Electrics for rolling stock

- Equipment for driver's cab
- Equipment for passenger use
- High-voltage switchgear
- High-voltage heaters
- High-voltage roof equipment
- Equipment for electric brakes
- Design and engineering of train electrics to customer requirements

We reserve the right to make technical alterations without prior notice.

For updated product information visit www.schaltbau-gmbh.com.

Issued 03-2019