

NEW

ijA/B/C – Series

Up to 150 W



Industrial



Automation



Test



Broadcast



Comms



Renewable



Size: Ultra high power density, dual phase 60A

Interface: PM Bus read and write compliant

Accuracy: Precision Vout setpoint; 0,5%

Digital adaptive control



Air Flow

Output current:	35, 60, 100A
Input voltage:	8 – 14Vdc
Output voltage:	0.6 – 3.3Vdc (adjustable)
Efficiency:	Up to 94%
Warranty:	3 years

More information: www.emea.tdk-lambda.com/ija
www.emea.tdk-lambda.com/ijb
www.emea.tdk-lambda.com/ijc

iBF / iAF – Series

5 – 15W



Industrial



Automation




Test



Broadcast



Comms

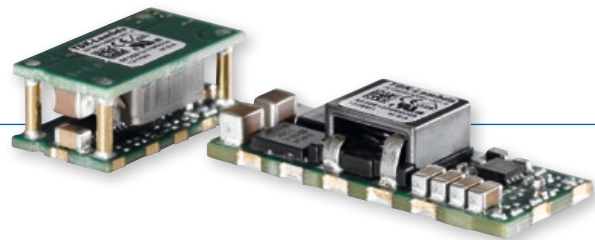

Shape: 2nd generation DOSA

Regulation: Excellent transient response

Soldering: LGA or EPC format

Non isolated output



Air Flow

Output current:	12, 20A
Input voltage:	4.5 – 14Vdc
Output voltage:	0.7 – 5.5Vdc (adjustable)
Efficiency:	Up to 93.5%
Warranty:	3 years

More information: www.emea.tdk-lambda.com/ibf
www.emea.tdk-lambda.com/iaf